




# TPSK

## 60 mm

### Key features

- Cutter with integrated paper chute
- Extended temperature range

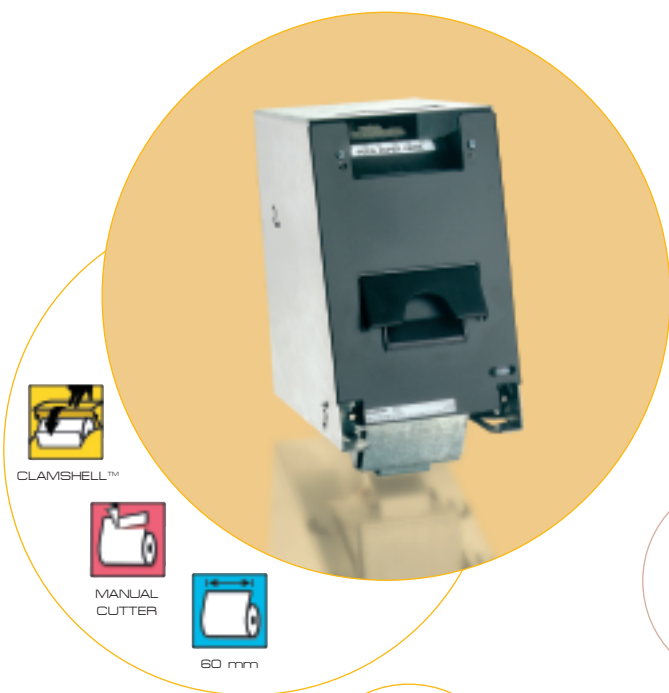

CHARACTERISTICS	UNIT	TPSK
Printing speed (max)	mm/s	100
Printing width	mm	48
Resolution	dot/mm	8
Number of dots	dot	384
Columns	column	24 or 32
Character size	dot*dot	12*24 - 16*24
Resident code page	---	CP437, CP858, user fonts
Bar code type	---	Interleaved 2/5, UPC-A & UPC-E, JAN 8 (EAN) & JAN 13 (EAN), Code 39&128
Paper width	mm	60
Paper roll diameter (max)	mm	102
Paper thickness	µm	60
Paper loading	---	Clamshell™
Operating voltage range	V	12-24
Current consumption	A	2.5 (average) - 13 (peak)
Head pulse life	pulse	1*10 <sup>8</sup>
Mechanical reliability	km	50
Dimensions (W*D*H)	mm	102*160*204
Weight	g	1700
Operating temperature	°C/F	0 to 60 (70 under specific conditions) /32 to 140 (158)
Operating humidity	%RH	20 to 90
Cutter	---	Automatic cutter by pulling the ticket
Cutter life	cut	300k
Presenter	---	Integrated paper chute
Data buffer	KByte	1
Interface	---	RS232 or DB9 or TTL
Driver	---	Windows™ 98/00/XP
Safety standards	---	UL, CSA, CE, FCC Class A
Sensors	---	Paper low, paper out, door open & paper jam detector
Options	---	Power supply, communication cable